

FSW-0811 Version: 3



## 8-Port Fast Ethernet Switch

The LevelOne FSW-0811 is a compact 8-port Fast Ethernet Switch. It is a high-performance, cost-effective and easy to use network switch for expanding home and office networks.

### Plug-and-Play Expansion of Home/Office Network

The LevelOne 8-port Fast Ethernet Switch is an easy to install “plug-and-play” switch, allowing users to either create a Local Area Network (LAN) or connect additional network devices, such as network cameras, storage devices or print servers, to an established network.

### Fast Ethernet Switching Architecture

The FSW-0811 delivers 200Mbps bandwidth per port and incorporates a non-blocking wire-speed switching architecture for seamless transferring of data through the network. All ports support auto-negotiation and auto-MDI/MDIX sensing, eliminating the need for crossover cables or Uplink ports. Each port can be used as general network ports or as connecting ports into a router, server, hub or another network switch.



1. LED Indicators
2. 10/100Mbps RJ-45 Ports
3. External Power Socket
4. Wall-Mountable

## Key Features

- Provides flexibility of 8 x 10/100BASE-TX ports
- 10/100Mbps, full/half-duplex, auto-negotiation, auto-MDI/MDIX
- Podpira samodejno učenje in samodejno staranje naslovov 1K MAC
- Krmiljenje toka IEEE 802.3x ščiti pred izgubo paketov in omogoča zanesljiv prenos podatkov
- 
- Provides wall or desktop mounting
- Minimalen vpliv na okolje zaradi napredne tehnologije učinkovite rabe energije (IEEE 802.3az)



## Specifications

### System Specifications

#### Standards & Protocols:

IEEE 802.3 10-BASE-T (Ethernet)  
IEEE 802.3u 100-BASE-TX (Fast Ethernet)  
IEEE 802.3x Flow Control (full-duplex flow control)  
IEEE 802.3az Energy Efficient Technology

#### Buffer Memory:

96KB

#### Port:

8 x 10/100Base-TX RJ-45 Port

#### Indicator:

Power; Link/Active

#### Transmission Method:

Store-and-Forward

#### Power Input:

100-240V AC, 50-60 Hz, DC 9V, 0.6A, External Power Adapter

#### Power Consumption:

< 4.8W

#### Backplane (Gbps):

1.6Gbps

#### MAC Address Table:

1K

#### Data Transfer Rate:

10/100Mbps

### Performance

#### Packet Forwarding Rate:

100Mbps port - 148,000pps  
10Mbps port - 14,880pps

### Environment

#### Power Saving:

IEEE 802.3az Energy Efficient Technology: Active Link Detection; Cable Length Detection; Sleep Mode

#### Temperature (°C):

Operating: 0°C ~ 40°C  
Storage: - 40°C ~ 70°C

#### Humidity (Non-condensing):

Storage: 5% ~ 90%  
Operating: 10% ~ 90%

#### Installation:

Desktop and wall-mountable

### Physical Specifications

#### Dimensions (W x D x H mm):


85 x 141 x 27.5 mm

### Approval and Compliance

EMI/EMS:  
CE, RoHS, FCC Class B

---

## Shema

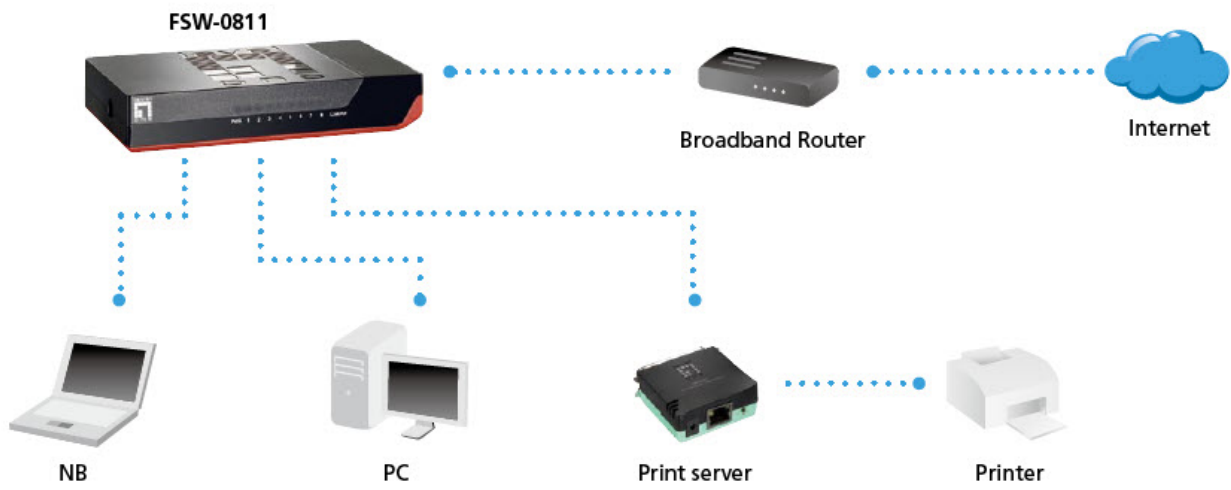

---

## Order Information

---

### Package Contents

FSW-0811  
Power Adapter  
Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.  
Specifications are subject to change without notice.  
All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.