



8-Port Fast Ethernet Switch

The LevelOne FSW-0811 is a compact 8-port Fast Ethernet Switch. It is a high-performance, cost-effective and easy to use network switch for expanding home and office networks.

Plug-and-Play Expansion of Home/Office Network

The LevelOne 8-port Fast Ethernet Switch is an easy to install “plug-and-play” switch, allowing users to either create a Local Area Network (LAN) or connect additional network devices, such as network cameras, storage devices or print servers, to an established network.

Fast Ethernet Switching Architecture

The FSW-0811 delivers 200Mbps bandwidth per port and incorporates a non-blocking wire-speed switching architecture for seamless transferring of data through the network. All ports support auto-negotiation and auto-MDI/MDIX sensing, eliminating the need for crossover cables or Uplink ports. Each port can be used as general network ports or as connecting ports into a router, server, hub or another network switch.



1. LED Indicators
2. 10/100Mbps RJ-45 Ports
3. External Power Socket
4. Wall-Mountable

Key Features

- Provides flexibility of 8 x 10/100BASE-TX ports
- 10/100Mbps, full/half-duplex, auto-negotiation, auto-MDI/MDIX
- Podpira samodejno učenje in samodejno staranje naslovov 1K MAC
- Krmiljenje toka IEEE 802.3x ščiti pred izgubo paketov in omogoča zanesljiv prenos podatkov
-
- Provides wall or desktop mounting
- Minimalen vpliv na okolje zaradi napredne tehnologije učinkovite rabe energije (IEEE 802.3az)



Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T (Ethernet)
IEEE 802.3u 100-BASE-TX (Fast Ethernet)
IEEE 802.3x Flow Control (full-duplex flow control)
IEEE 802.3az Energy Efficient Technology

Buffer Memory:

96KB

Connectors and Cabling:

8 x 10/100Base-TX RJ-45 Port

Indicator:

Power; Link/Active

Transmission Method:

Store-and-Forward

Power Input:

100-240V AC, 50-60 Hz, DC 9V, 0.6A, External Power Adapter

Power Consumption:

< 4.8W

Performance

Backplane (Gbps):

1.6Gbps

MAC Address Table:

1K

Data Transfer Rate:

10/100Mbps

Packet Forwarding Rate:

100Mbps port - 148,000pps

10Mbps port - 14,880pps

Environment

Power Saving:

IEEE 802.3az Energy Efficient Technology: Active Link Detection; Cable Length Detection; Sleep Mode

Temperature (°C):

Operating: 0°C ~ 40°C

Storage: - 40°C ~ 70°C

Humidity (Non-condensing):

Storage: 5% ~ 90%

Operating: 10% ~ 90%

Deployment:

Desktop and wall-mountable

Physical Specifications


Dimensions (W x D x H mm):

85 x 141 x 27.5 mm

Approval and Compliance

EMI/EMS:
CE, RoHS, FCC Class B

Schema

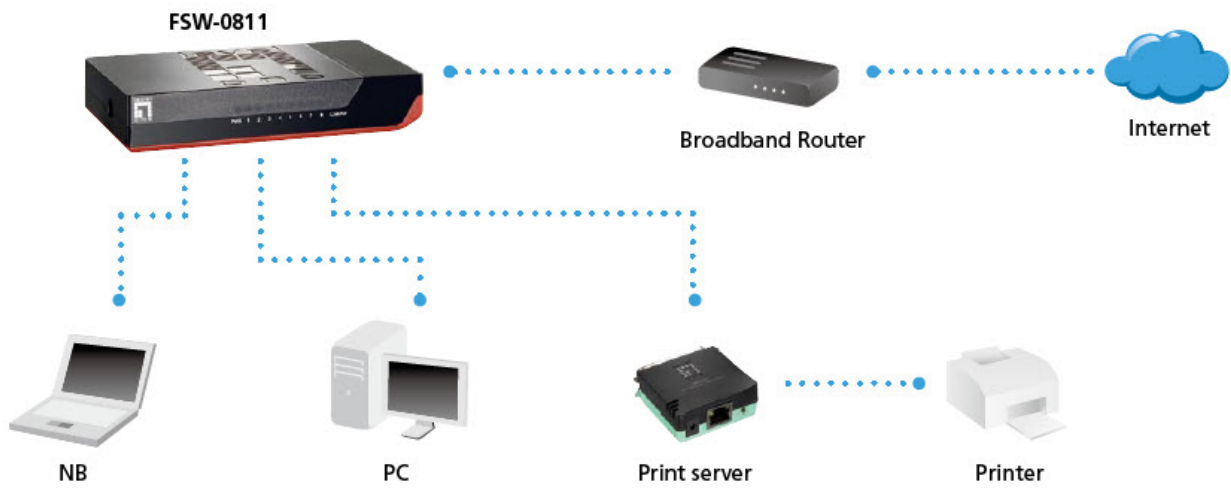

Order Information

Package Contents

FSW-0811
Power Adapter
Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.